P5403/N243/PN-SX12

1 INSTALLATION

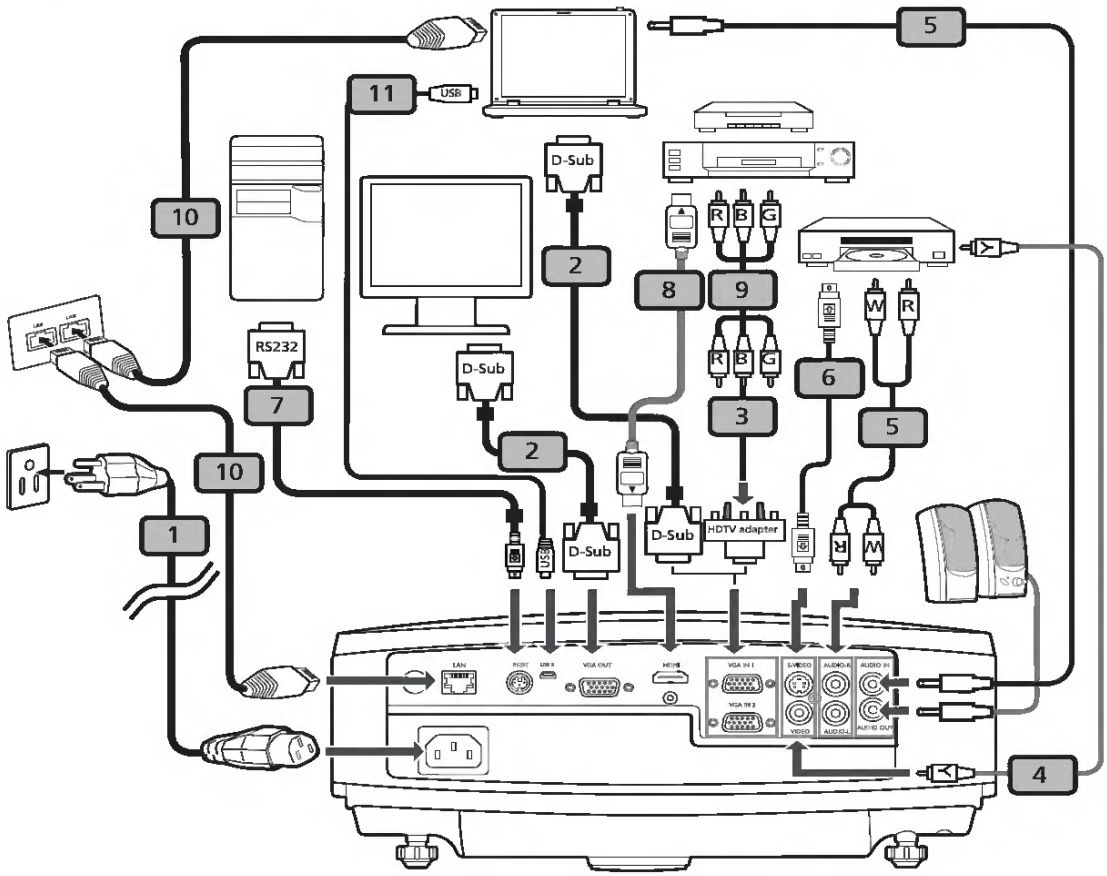

2 INTERFACE CONNECTOR

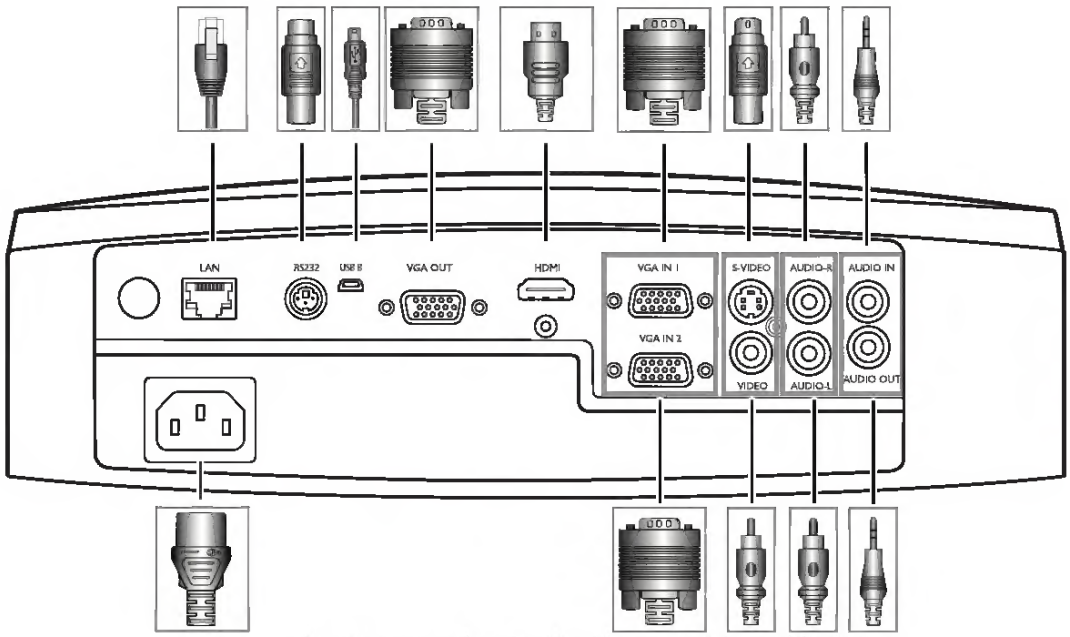

Note: Connector interface is subject to model's specifications

Downloaded from www.Manualslib.com manuals search engine

S5201M/T111B/PS-X11M

1 INSTALLATION

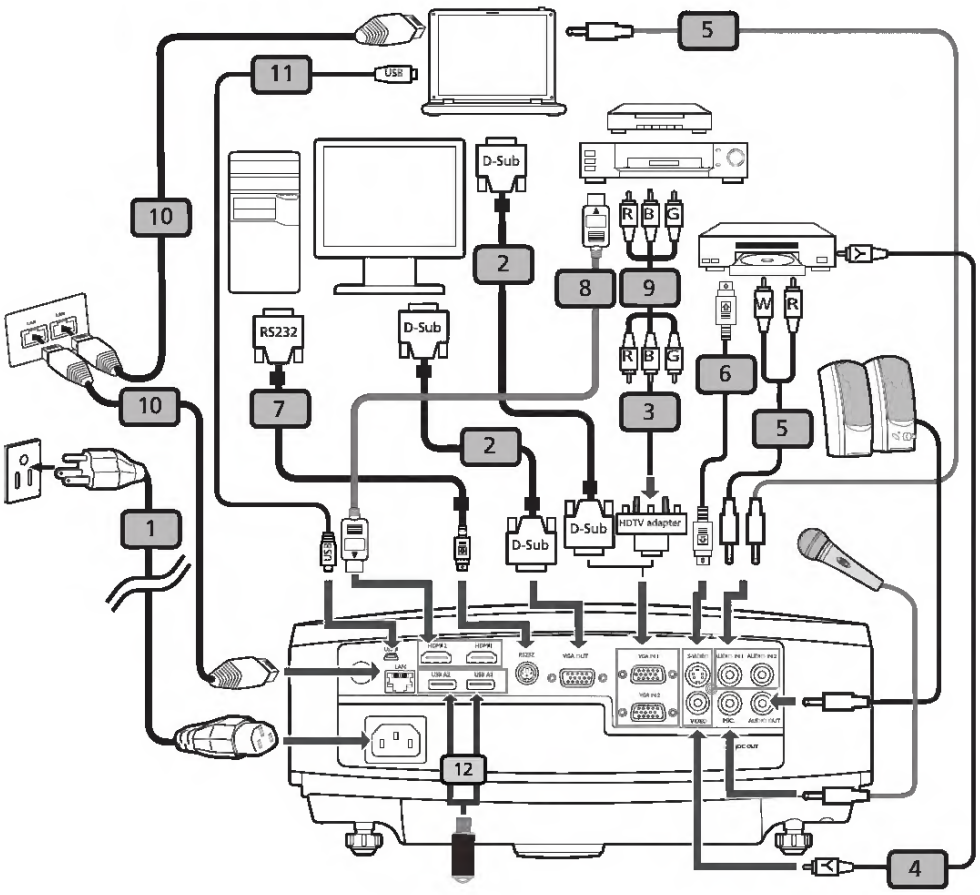

2 INTERFACE CONNECTOR

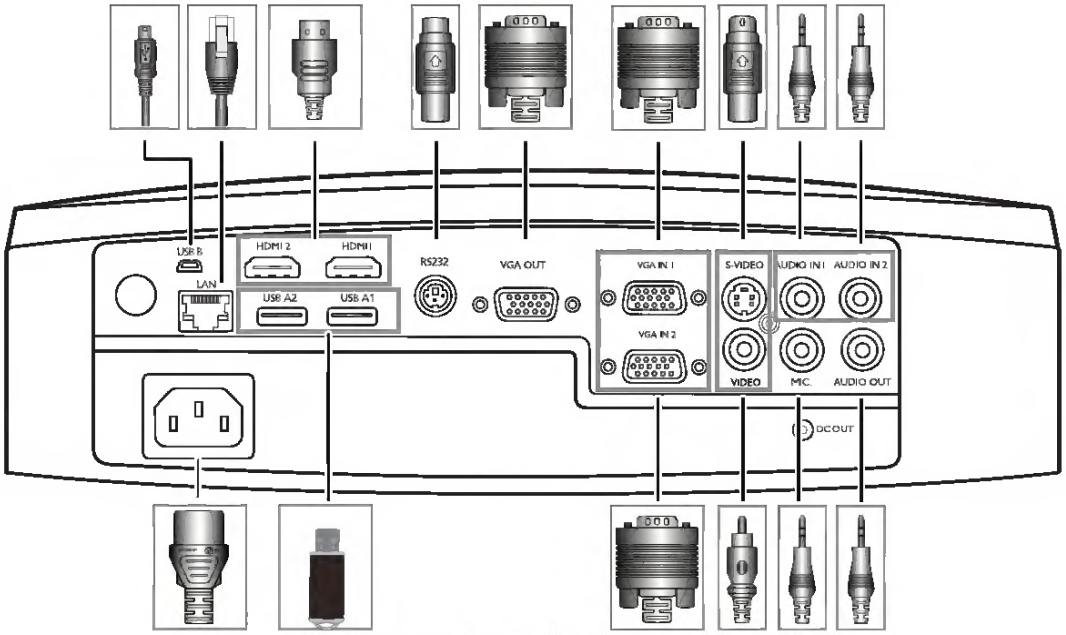

Note: Connector interface is subject to model's specifications

Downloaded from www.Manualslib.com manuals search engine

English

Quick Start

1 INSTALLATION

1. Power cord
2. VGA cable
3. VGA to component video/HDTV adapter
4. Composite video cable
5. Audio cable
6. S-Video cable
7. RS232 cable
8. HDMI cable
9. 3 RCA component cable
10. RJ45 cable
11. USB cable
12. USB storage device

Note: Connector interface is subject to model's specifications

2 INTERFACE CONNECTOR

Connecting to a Computer

1. Ensure the projector and your computer are turned off.
2. Connect one end of the VGA cable to the "VGA IN 1" or "VGA IN 2" connector on the projector; connect the other end to the VGA connector on the computer and tighten the screws.
3. Connect one end of the power cord into the AC power socket on the projector; connect the other end to an electrical outlet.

Powering On the Projector

1. Remove the lens cap.
2. Turn on the projector first and then the computer.
3. Adjust the position, focus and zoom.
4. Run your presentation.

Powering Off the Projector

1. Press the power button twice.
2. Do not remove AC power cord from outlet until the projector fans shut down.

繁體中文

快速啟用

1 安裝

1. 電源線
2. VGA 訊號線
3. VGA 轉色差視訊／ HDTV 轉接器
4. 複合視訊訊號線
5. 音訊訊號線
6. S-Video 連接線
7. RS232 連接線
8. HDMI 連接線
9. 3 向 RCA 色差視頻連接線
10. RJ45 連接線
11. USB 連接線
12. USB 儲存裝置

備註：接頭介面符合機型的規格。

2 介面接頭

連接至電腦

1. 請確定已關閉投影機及電腦的電源。
2. 將 VGA 訊號線的 一端連接至投影機的「VGA IN 1」或「VGA IN 2」接頭，將另 一端連接至電腦的 VGA 接頭並鎖緊螺絲。
3. 將電源線的 一端連接投影機的 AC 電源插孔，另 一端則連接至電源插座。

開啟投影機電源

1. 取下鏡頭蓋。
2. 請先開啟本產品電源，再開啟電腦。
3. 調整位置、焦距和縮放。
4. 進行簡報。

關閉投影機電源

1. 請按兩下電源按鈕。
2. 投影機風扇關閉之前，請勿從插座上拔除 AC 電源線。

Downloaded from www.Manualslib.com manuals search engine